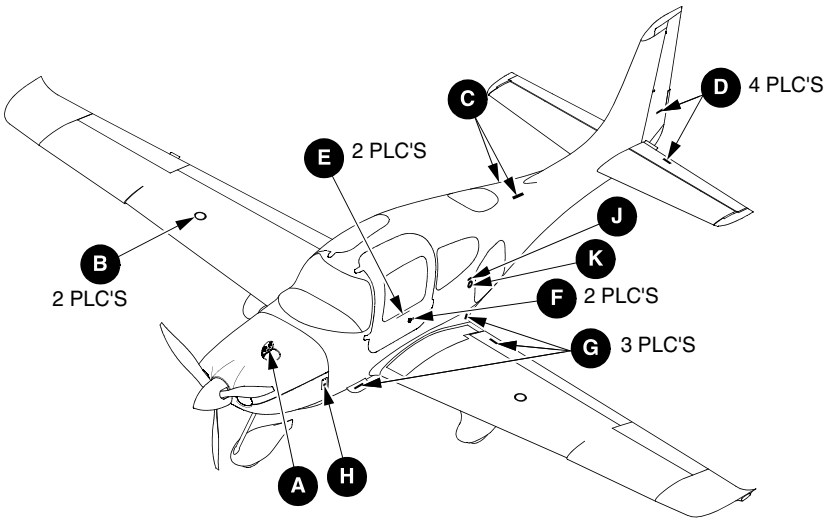

TYPE D'HUILE MOTEUR
AU-DESSUS DE 4°C (40°F) SAE 50 OU 20W50
AU-DESSOUS DE 4°C (40°F) SAE 30, 10W30, 15W50 OU 20W50
CONSULTER LA LISTE DES HUILES APPROUVEES DANS
LE MANUEL D'UTILISATION DE L'AVION

3

DETAIL A

6
ESSENCE AVIATION MINIMUM 100LL OU 100
CAPACITE TOTALE UTILISABLE DE 153 LITRES (40,5 GALLONS AMERICAINS)
CAPACITE UTILISABLE DE 89 LITRES (23,5 GALLONS AMERICAINS) JUSQU'A LA LANGUETT
15648-009

7
ESSENCE AVIATION MINIMUM 100LL OU 100
CAPACITE TOTALE UTILISABLE DE
174 LITRES (46 GALLONS AMERICAINS)
CAPACITE UTILISABLE DE 114 LITRES (30 GALLONS AMERICAINS) JUSQU'A LA LANGUETTE
18347-002

DETAIL B

ATTENTION

FUSEE POUR DEPLOIEMENT DU PARACHUTE, A L'INTERIEUR

RESTER A L'ECART QUAND L'AVION EST OCCUPE

9

DETAIL C

FR_SR22_PC11_1461A

Figure-04
Exterior Placards - French (Sheet 1 of 3)

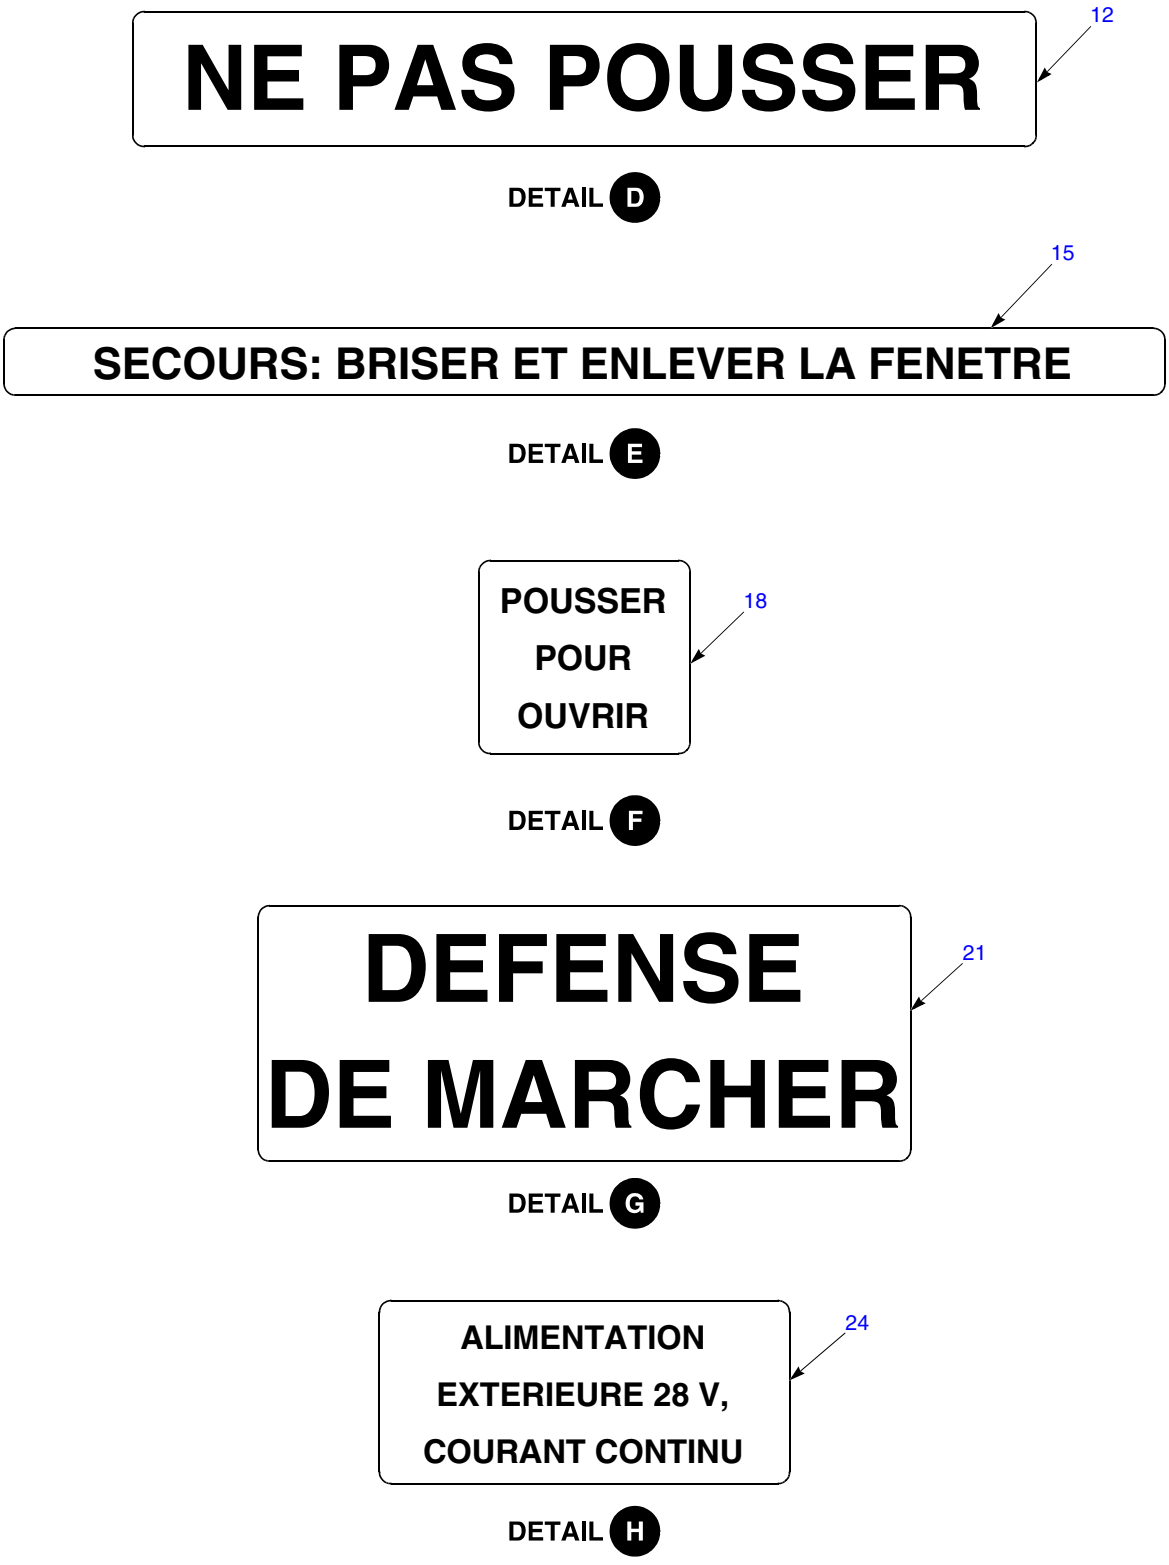

Figure-04
Exterior Placards - French (Sheet 2 of 3)

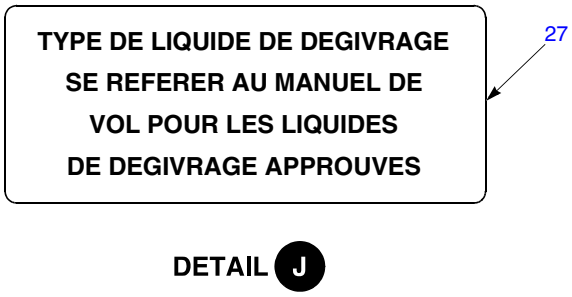

DETAIL J

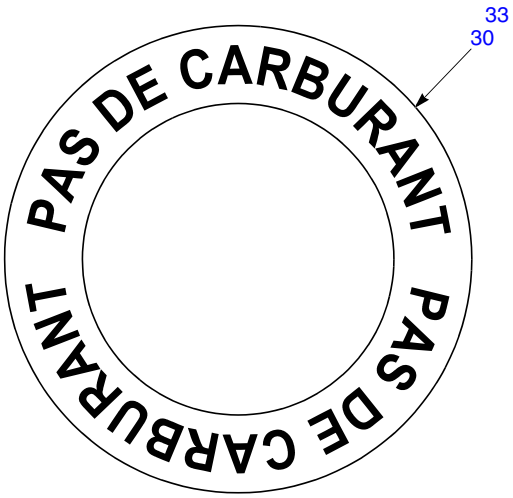

DETAIL K

FR_SR22_PC11_1463

Figure-04
Exterior Placards - French (Sheet 3 of 3)

EFFECTIVITY:
All

FIG	NO PIC	ITEM	PART NUMBER	SYMBOL	ATTACH	NOMENCLATURE 12345678	VENDOR	EFFECTIVE FROM	EFFECTIVE TO	UNIT PER ASSY
-04	-	1	NO PART NUMBER	**		EXTERIOR PLACARDS, FRENCH		0002		NP
		3	14231-006			·PLACARD, OIL DOOR		0002		AR
		6	15648-009			·FUEL RING, PLACARD		0002	2437	AR
		7	18347-002			·FUEL RING, PLACARD		2438		AR
		9	12430-003			·PLACARD, CAPS COVER		0002		AR
		12	12431-003			·PLACARD, NO PUSH		0002		AR
		15	12437-003			·PLACARD, RESCUE		0002		AR
		18	20547-003			·PLACARD, DOOR LATCH, EXTERIOR		0002		AR
		21	12433-003			·PLACARD, NO STEP		0002		AR
		24	12432-004			·PLACARD, GRD POWER RECEPTACLE		0002		AR
		27	15334-004			·PLACARD, TANK, W/ ICE PROTECTION		0002		AR
		30	15518-003			·PLACARD, NO FUEL, W/ ICE PROTECTION		0002	2437	AR
		33	18458-003			·PLACARD, NO FUEL, W/ ICE PROTECTION		2438		AR
						SYMBOL NOTES:				
				**		AIRCRAFT SERIAL NUMBERS 2334 AND 2420, REFER TO SERIAL 2438 FOR PART IDENTIFICATION. SEE SPECIAL CONDITIONS SECTION OF IPC INTRODUCTION FOR DETAILED DESCRIPTION.				